

Dräger X-am[®] 2500 Multi-Gas Detection

Dräger's X-am[®] 2500 accurately detects O₂, CO, NO₂, SO₂ and H₂S and is the only 1-4 gas monitor you need in industrial, mining and refinery applications. The X-am 2500 combines reliable sensor technology with long battery life and intuitive operation in an instrument that defines safety.

Safe gas entry
Gas entry from 2

Visual alarm
Alarm visible across

Robust design
Water and dust resistant in
acc. with IP 67

**Crocodile
clip**

**Dräger
sensors**

**Large
display**



Benefits

Matrix display

The X-am 2500 has a large, easy to read, liquid-crystal display. All gas readings are shown simultaneously and resize automatically depending on the number of sensors installed. When a gas alarm occurs, the reading for the sensor in alarm will be highlighted and will alternate with the alarm level indication of A1 or A2.

High capacity battery

The Dräger X-am 2500 can operate for more than 12 hours with either alkaline batteries or with rechargeable NiMH batteries. Depending on the requirements, the batteries can be charged either in the workshop or in a vehicle. Operating time without an Ex sensor installed is typically more than 250 hours.

X-dock compatibility

The X-am 2500 is compatible with Dräger's X-dock testing and calibration station. X-dock is Dräger's new solution for efficient maintenance and comprehensive equipment management. Used for functional testing and complete documentation, X-dock can complete bump tests in 8 to 15 seconds with more than 40 % less gas consumption than competitive instruments. The X-am 2500 is also compatible with the Dräger Bump Test Station.

Long-lasting, reliable sensor technology

The innovative, catalytic Ex sensor has a high degree of drift stability with a high resistance to silicone and hydrogen sulfide. The sensor boasts an expected service life of more than five years and is extremely sensitive to flammable gases and vapors. Further, the X-am 2500 is approved for measuring from methane to nonane, according to IEC/EN 60079-29-1.

Zone 0 approved

The Dräger X-am 2500 has Ex approval for zone 0 for user safety in areas subject to explosion hazard. Additionally, it is not sensitive to electromagnetic radiation, e.g. from wireless devices and is water and dust resistant in accordance with protection class IP 67.

Diffusion or pump

An optional external pump with a hose up to 98 ft long is available for use in tanks and shafts or when searching for leaks. The switch from diffusion to pump operation can be handled quickly and easily without tools or screws.

Benefits

Ergonomic and robust

The Dräger X-am 2500 is comfortably worn thanks to its low weight and ergonomic design and gas can enter the unit from above and from the front – even if the instrument is inside a pocket or if the front gas entry is accidentally covered.

The practical two button control panel and easy menu navigation allow for intuitive operation while the integrated protective rubber coating and sensors not sensitive to shock provide additional safety in case of impacts or vibrations.

Peak value functionality

The X-am 2500 can store the highest gas readings for the Ex and toxic gas sensors and the lowest reading for the O₂ sensor. These readings can be easily reset after a gas exposure without having to turn the monitor off and on.



East Wind

System Components



DrägerSensor® XXS

A small sensor—one giant step into the future: The new DrägerSensor® XXS range is remarkably compact and boasts an even higher performance than the competition.

System Components



ST-740-2006

Dräger Bump Test Station

Easy-to-use, stand-alone, and flexible: With the Bump Test Station, function tests of gas detection and warning devices can be carried out easily and independently of the location.



ST-1535-2007

Dräger Catalytic Ex-Sensors

The Draeger Sensor Catalytic Ex-Sensors measure multiple gases at the same time--combustible gases and vapors in the air.



D-47907-2012

Dräger X-dock® 5300/6300/6600

Automatic bump tests, calibration, reduced test gas consumption, short testing times, and comprehensive documentation come standard in this new device from Dräger, the experts in gas detection.

East Wind

Accessories



Calibration gas and accessories

For the safe operation of devices, applicable regulations and statutory provisions are to be met and complied with. Therefore, regular calibrations and function tests are necessary. Different systems are available so that products meet a wide range of calibration requirements.



Power pack & Charging set


Consisting of: NiMH power supply, charging module, single charger



Car charging adapter



Vehicle charger mounting kit

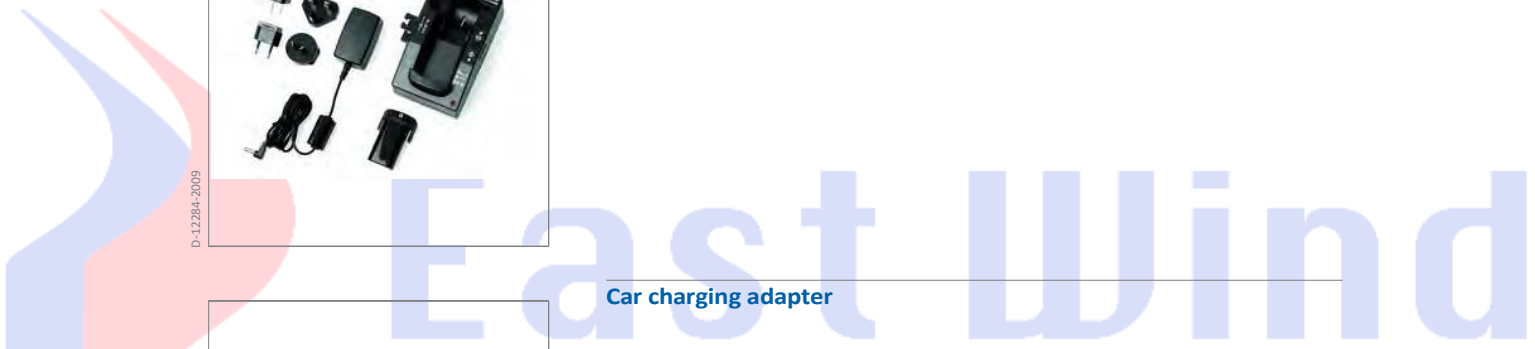

Accessories



Calibration cradle



Leather carrying case



Dräger X-am 125, external pump

External pump for hose length of up to 30 meters (98 feet). Makes it possible to use the detector for pre-entry measurements into confined spaces such as tanks, shafts, etc. The pump starts automatically when the detector is inserted. The change between diffusion and pump operation is quickly and easily possible without any need for additional tools or steps.

Related Products



D-27784-2009

Dräger X-am® 5600

Innovation in the palm of your hand. Dräger X-am® 5600 – Unprecedented protection from the market's smallest, infrared-capable, six-gas personal monitor. In combination with our revolutionary X-zone® you have one of the most powerful area monitors in the world.



ST-67-2006

Dräger X-am® 7000

Dräger X-am® 7000 is the innovative solution for the simultaneous and continuous measurement of up to five gases. A combination of more than 25 sensors allows flexible solutions to individual monitoring tasks. It is the ideal companion in a variety of applications where the reliable detection of oxygen, toxic and combustible gases and vapors is necessary.



ST-9466-2007

Dräger X-am® 5000 Personal Monitor

The smallest gas detection instrument for up to five gases, the Dräger X-am® 5000 belongs to a new generation of detectors developed especially for personal monitoring. It reliably measures oxygen, organic vapors, combustible gases, and harmful concentrations of CO, H₂S, CO₂, Cl₂, HCN, NH₃, NO₂, PH₃, and SO₂ with high sensitivity to keep the user safe.



D-4946-2014

Dräger X-zone® 5500

Dräger's X-zone 5500 brings a safer, more effective way to monitor hazardous gases--reinventing area monitoring. In combination with the Dräger X-am® 5000, 5100, or 5600 gas detection instruments, the X-zone® 5500 can be used for the measurement of up to six gases and extends the range of your portable gas detection technology exponentially.

Technical Data

| | | | |
|------------------------|--|---|---|
| Dimensions (W × H × D) | | 48 × 130 × 44 mm (1.85" × 5.12" × 1.73") | |
| Weight | | 220 – 250 g (8 - 9 oz) | |
| Ambient conditions | Temperature | - 20 to + 50 °C (-4 to 122°F) | |
| | Pressure | 700 to 1300 mbar (20.7 to 38.4 inch Hg) | |
| | Relative humidity | 10 to 95 % r.h. | |
| Protection class | | IP 67 | |
| Alarms | Visual | 360° | |
| | Audible | Multi-tone > 90 dB at 30 cm | |
| | Vibration | | |
| Operating times | | > 12 h with alkaline and NiMH, >13 h with NiMH HC, > 250 h w/o Ex sensor with alkaline batteries | |
| Charging times | | < 4 h | |
| Datalogger | | Retrievable using an infrared interface > 1000 h with 4 gases at a recording interval of 1 value per minute | |
| Approvals | ATEX | I M1 Ex ia I Ma, II 1G Ex ia IIC T3 Ga, I M2 Ex d ia I Mb, II 2G Ex d ia IIC T4/T3 Gb | |
| | | Performance approval to: | |
| | | EN 50104(2002) + A1 (2004) | O ₂ |
| | | EN 45544 | CO & H ₂ S |
| | | EN 60079-29-1:2007 | Methane to nonane |
| | | EN 50271:2001 | Software and documentation |
| | | CSA (Canada & USA) | Class I Div. 1 Group A, B, C, D T.-Code T4/T3 |
| | | | A/Ex ia IIC T3/Ga |
| | | | A/Ex d ia IIC T4/T3/Gb |
| | | IECEX | Ex ia I Ma Ex ia IIC T3 Ga Ex d ia I Mb Ex d ia IIC T4/T3 Gb |
| | Electromagnetic Compatibility (Directive 2004/108/EC); | | |
| CE mark | ATEX (Directive 94/9/EC) | | |
| | Marine Equipment Directive (Directive 96/98/EC) | | |
| | MED | | |

Ordering Information

| X-am® 2500 NiMH | Order No. |
|---|-----------|
| X-am® 2500 Ex/CO, NiMH w/charger kit | 45 42 283 |
| X-am® 2500 Ex/H ₂ S, NiMH w/charger kit | 45 42 285 |
| X-am® 2500 Ex/O ₂ /CO/H ₂ S, NiMH w/charger kit | 45 42 261 |
| X-am® 2500 Ex/O ₂ /CO/NO ₂ , NiMH w/charger kit | 45 42 263 |
| X-am® 2500 Ex/O ₂ /CO, NiMH w/charger kit | 45 42 265 |
| X-am® 2500 Ex/O ₂ /H ₂ S, NiMH w/charger kit | 45 42 267 |
| X-am® 2500 Ex/O ₂ , NiMH w/charger kit | 45 42 269 |
| X-am® 2500 O ₂ /CO/H ₂ S-LC NiMH w/charger kit | 45 42 273 |
| X-am® 2500 Ex, NiMH w/charger kit | 45 42 271 |
| X-am® 2500 O ₂ /CO NiMH w/charger kit | 45 42 275 |
| X-am® 2500 O ₂ /H ₂ S-LC NiMH w/charger kit | 45 42 277 |
| X-am® 2500 O ₂ /H ₂ S-LC NiMH w/charger kit | 45 42 279 |

Ordering Information

X-am® 2500 Alkaline

| | |
|--|-----------|
| X-am® 2500 Ex/O ₂ /CO/H ₂ S, Alkaline Battery Pack | 45 42 262 |
| X-am® 2500 Ex/O ₂ /CO/NO ₂ , Alkaline | 45 42 264 |
| X-am® 2500 Ex/O ₂ /CO, Alkaline Battery Pack | 45 42 266 |
| X-am® 2500 Ex/O ₂ /H ₂ S, Alkaline Battery Pack | 45 42 268 |
| X-am® 2500 Ex/O ₂ , Alkaline Battery Pack | 45 42 270 |
| X-am® 2500 Ex, Alkaline Battery Pack | 45 42 272 |
| X-am® 2500 O ₂ /CO/H ₂ S-LC Alkaline | 45 42 274 |
| X-am® 2500 O ₂ /CO Alkaline | 45 42 276 |
| X-am® 2500 O ₂ /H ₂ S-LC Alkaline | 45 42 278 |
| X-am® 2500 Ex/O ₂ /H ₂ S-LC/SO ₂ Alkaline | 45 42 280 |
| X-am® 2500 CO/H ₂ S, Alkaline Battery Pack | 45 42 282 |
| X-am® 2500 Ex/H ₂ S, Alkaline Battery Pack | 45 42 286 |
| X-am® 2500 Ex/CO, Alkaline Battery Pack | 45 42 284 |

Power Supply Units

| | |
|---|-----------|
| NiMH Battery Pack, X-am 1/2/5000 | 83 18 704 |
| Battery Holder, Alkaline, 2 "AA" | 83 18 703 |
| AA Alkaline Battery (2 req'd) | 45 88 195 |
| NiMH Battery Kit | 83 18 785 |
| NiMH HC power pack T4 | 83 22 244 |
| Alkaline power pack (w/o batteries) | 83 22 237 |
| NiMH HC power pack T4 with charging module and PSU (complete set) | 83 22 785 |

Charging Accessories

| | |
|---|-----------|
| Battery Charge Cradle | 83 18 639 |
| Charging kit consisting of a charging module and a single charger (worldwide) | 83 20 333 |
| Power Supply, Vehicle Adapter, 12 vdc | 45 30 057 |
| Power Supply for up to 2 Charge Cradles | 83 15 635 |
| Power Supply for up to 5 Charge Cradles | 83 16 994 |
| Power Supply for up to 20 Charge Cradles | 83 15 805 |
| Battery Charger Vehicle Mounting kit | 83 18 779 |
| Replacement Vehicle Mount Strap X-am® 1/2/5000 Series | 83 18 788 |
| Replacement Vehicle Mount Strap X-am® 1/2/5000 Series – US Version | 45 43 938 |

Pump Accessories

| | |
|--|-----------|
| Remote Sampling Pump, X-am® 1/2/5000 | 83 19 400 |
| X-am® 2500 Confined Space Kit for Ex, O ₂ , CO and H ₂ S | 45 42 260 |
| Confined Space Entry Set for X-am® 1/2/5000 Pump | 45 43 760 |
| Dust/Water Stop Filter for 8319400 Pump | 45 43 759 |
| Kit, pump inlet w/nut, X-am® 1-2-5000 Spare | 45 94 854 |
| PX2 pump for X-am® 125 | 45 43 982 |
| Hand Pump Kit with 10 ft (3 m) Tygon Tubing | 45 94 585 |
| Water Trap, Dust/Mist Filter for Hand Pump Kit | 45 23 078 |
| Telescopic Probe, 4.5 feet | 45 10 546 |
| Telescopic Probe, 6.5 feet | 45 10 545 |

Notes



East Wind

Tel : 02 - 5511710
P.O. Box 30063
ICAD, Musaffah,
Abu Dhabi, UAE

Tel : 04 - 5147114
Office # 303,
Dubai Maritime City
Dubai, UAE.

sales@eastwindsafety.com
www.eastwindsafety.com

