


Dräger X-plore® Rd90 Filters Filter

Clean air for tough jobs. The filters of the Dräger X-plore® Rd90 series protect from hazardous gases and vapors, have a long life and can be used for many different masks.



Fast Wind

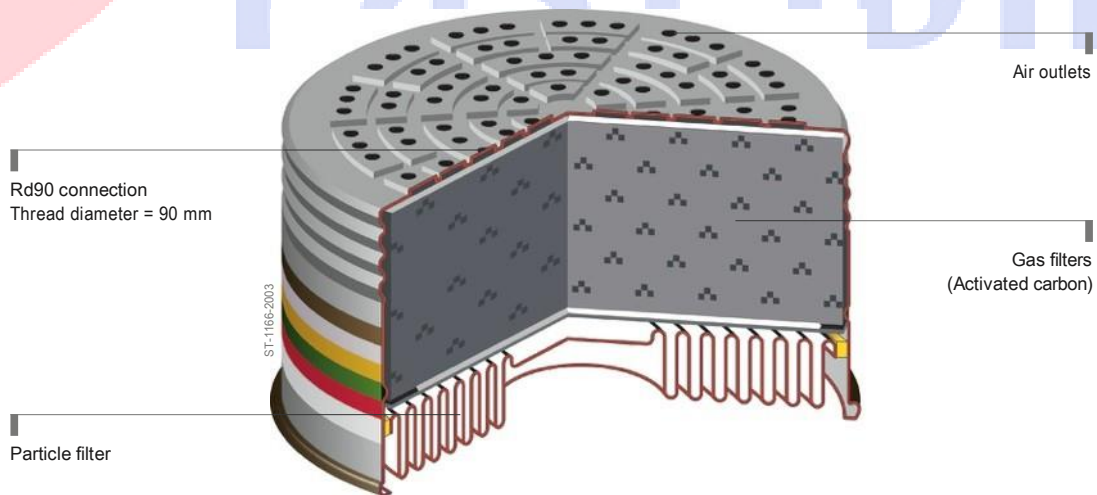

Benefits

Extensive filter range

The X-plore Rd90 filter series offers an extensive range of various filter types for all major applications and protects against many gases and vapors.

Universal fit

The filters have been designed for use in the Dräger half masks, X-plore® 4390 and 4790. With the 40/90 filter box adapter they can also be used for any mask with a Rd40 connection in accordance with EN 148-1.

Long life

The gas filters and combination filters have a shelf-life of 6 years and the particle filters a shelf life of 12 years from date of manufacture.

Individual packaging

The filters are packed individually to ensure optimum protection of the unused filter.

Supporting filter selection

The Dräger VOICE database of hazardous substances offers comprehensive support for selecting filters (www.draeger.com/voice).

Aluminum housing

The aluminum housing ensures that any damage to the filter is easily detected, therefore providing extra security.

CE marking

All filters are CE-marked in accordance with EN 14387 and/or EN 143.

Rd40 thread connection

The filters are suitable for use with half and full face masks with standard thread connection Rd40 according to EN 148-1.

Technical Data

FILTER COLOUR CODING

Color	Filter Type	Main field of application
Brown	A	Gases and vapors of organic compounds with boiling point > 65 °C
Grey	B	inorganic gases and vapors, e.g. chlorine, hydrogen sulphide, hydrogen cyanide
Yellow	E	Sulphur dioxide, hydrogen chloride
Green	K	Ammonia
Red	Hg	Mercury vapor
White	P	Particles

Ordering Information

Filter Type	Packing Unit (pc.)	Weight	Order Code
Particle Filters			
990 Coarse dust filter	50	2 g	67 36 705
990 P2 R	5	35 g	67 37 357
990 P3 R	5	35 g	67 37 190
Gas Filters			
990 A1	5	80 g	67 38 865
990 A2	5	115 g	67 38 866
990 A1B1E1K1	5	160 g	67 38 810
Combination Filters			
990 A1 P2 R D	5	90 g	67 38 867
990 A1 P3 R D	5	90 g	67 38 869
990 A2 P3 R D	5	125 g	67 38 870
990 A1B1 P2 R D	5	100 g	67 38 774
990 A2B2 P2 R D	5	165 g	67 38 771
990 A2B2 P3 R D	5	175 g	67 38 773
990 B1E1 P2 R D	5	100 g	67 38 770
990 A1B1E1K1 P2 R D	5	165 g	67 38 811
990 A1B1E1K1 Hg P3 R D	5	170 g	67 38 812
Accessories			
Filterbox 40/90 (Adapter)	5	45 g	R 55 015

Marking D: for successfully passed dolomite test

Marking R: Reusable – protection for more than one work shift

Notes



East Wind



(T) +971 255 17786
(T) +971 451 47114
(F) +971 266 63089

ISO 9001:2015
ISO 29001:2010



P.O.Box 27301, ICAD III, Musaffah South
Abu Dhabi, United Arab Emirates
www.eastwindsafety.com