

Dräger Polytron® 8900 UGLD Ultrasonic-Gas-Leak-Detector

The Dräger Polytron® 8900 UGLD transmitter is an early warning area monitor for detecting high-pressure gas leaks in outdoor industrial process environments. Thanks to an ultrasonic acoustic sensor, it responds earlier than conventional gas detectors because it registers the sound of leaking gas instead of measuring the concentration of accumulated gas clouds. As gas escapes, leaks are immediately detected in the surrounding area, regardless of the wind direction.



Benefits

Ultrasonic sensor technology – the early warning system for gas leaks

Typical gas detection systems used to monitor pressurised gas pipes or containers in industrial environments only detect a gas leak if the gas is in the immediate vicinity of the gas sensor. Environmental influences such as wind can delay or prevent a gas cloud from being detected by gas sensors. However, the Dräger Polytron® 8900 UGLD is not affected by these environmental factors and detects a high-pressure gas leak as soon as gas escapes. Effective early gas leak warnings can prevent unnecessary shutdowns, saving time and money.

A perfect complement to your gas detection system

The Dräger Polytron 8900 extends the Polytron 8000 series family with acoustic gas leak detection. All transmitters in this series have the same design and an identical user interface. A common user interface ensures that little training or maintenance is required for existing users. The Polytron 8900 UGLD perfectly complements existing flame and gas detection systems with reliable early gas leak warnings.

Delivers results that are easy to understand

For an easy interpretation of results, the measured values on the display of the Polytron 8900 UGLD are shown from 0 to 100 percent of the full scale decibel sensitivity range. The ultrasound level is immediately displayed and transmitted and allows for an easy interpretation. Alarms are configured at a specific level above a predetermined background noise level. Additionally, a time delay of up to 30 seconds can be set in the control system.

Can even detect gas leaks in loud industrial environments

Loud process areas generate noise which is mostly in the audible spectrum. Gas leaks from pressurized vessels above 10 bar generate both audible sound and inaudible ultrasound. Since Polytron 8900 is tuned to measure in the ultrasound spectrum, it can easily identify gas leaks with a leak rate of 100 g/sec in a 20 meter radius circle.

Robust design and fully-sealed sensor

The Polytron 8900 UGLD is an explosion-proof transmitter with a sensor housed in a galvanically-isolated, intrinsically-safe enclosure. The sensor is an ultrasonic microphone that is completely sealed in PVCC, making it impervious to water and dirt. It provides reliable readings without the need for an additional environmental protection baffle. Regular calibration is not necessary, but unlike some other UGLDs on the market, calibration is possible and easy with the offered calibration kits. The expected lifespan of the ultrasonic sensor is more than 10 years.

System Components



D-6806-2016

Dräger REGARD® 7000

The Dräger REGARD® 7000 is a modular and therefore highly expandable analysis system for monitoring various gases and vapours. Suitable for gas warning systems with various levels of complexity and numbers of transmitters, the Dräger REGARD® 7000 also features exceptional reliability and efficiency. An additional benefit is the backward compatibility with the REGARD®.

Accessories



D-5554-2018

Calibration and bump test kit

Even though the UGLD's sensor does not need to be replaced and does not need regular calibrations, they are still possible. Unlike some other UGLDs on the market, a calibration can be performed using a system similar to that of traditional gas detectors. The kit has room for a standard compressed air cylinder and generates a certified sound level using a sensor adapter. There is an additional adapter for zeroing the sensor. A directional sonic generator uses compressed air to generate sound, which can be used to bump test a specific UGLD from up to five meters away.




D-13019-2018

Remote sensor

With the EC Sensing Head Remote, the UGLD's sensor can be installed up to 30 metres away from the Polytron 8900 in a separate compact housing. The separate sensor housing with included field cable is intrinsically safe, which makes installation considerably easier and more flexible. This means that it is not necessary to search for a suitable cable and the sensor's position can even be adjusted within an Ex zone later on.

Accessories

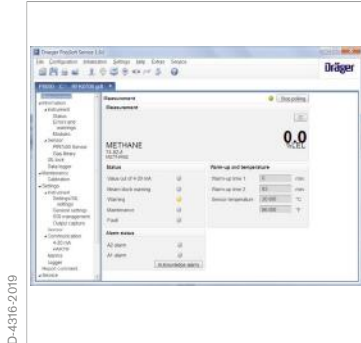

D-4316-2019

Dräger PolySoft software

The optional Dräger PolySoft Windows® software is used for configuration, firmware upgrades, diagnostics, and downloading the Polytron's built in datalogger. All from the comfort of your control room using the digital HART® signal that rides on top of the analog 4-20 mA signal. Out in the field, an available non intrusive IR dongle easily connects Polytron® to PolySoft.

Related Products



D-52804-2012

Dräger Polytron® 8100 EC

The Polytron® 8100 EC is Dräger's top of the line explosion-proof transmitter for the detection of toxic gases or oxygen. It uses a high performance plug and play electrochemical DrägerSensor to detect a specific gas. Besides having a 3-wire 4 to 20 mA analogue output with relays, it also offers Modbus and Fieldbus protocol making it compatible with most control systems.



D-14983-2010

Dräger Polytron® 8700 IR

The Dräger Polytron® 8700 IR is an advanced explosion proof transmitter for the detection of combustible gases in the lower explosion limit (LEL). It uses a high performance infrared Dräger PIR 7000 sensor, which will quickly detect most common hydrocarbon gases. Besides a 3 wire 4 to 20 mA analogue output with relays, it also offers Modbus and Fieldbus making it compatible with most control systems.

Related Products

D-5570-2018



Dräger Pulsar 7000 Series

The Dräger Pulsar 7000 Series are stationary open path gas detectors for the detection of explosive hydrocarbons in gases and vapours. The robust design and the extremely rapid response time make the Dräger Pulsar 7000 Series a dependable solution for your requirements in the oil and gas industry, as well as the chemical industry.

D-48077-2012



Dräger Flame 5000

The Dräger Flame 5000 is an imaging based explosion proof flame detector. This visual flame detection system uses digital image processing and advanced algorithms to process and interpret flame characteristics. This principle offers an extended field of view and fewer false alarms. Each detector is equipped with a colour CCTV camera.

Technical Data

Dräger Polytron® 8900 UGLD

Type	Explosion proof / flameproof enclosed transmitter ("d") or combined with increased safety ("d/e")			
Gases	Flammable and toxic gases such as hydrogen, methane, ethylene, propane, CO ₂ , nitrogen and hydrogen sulphide			
Measurement ranges	0-100% equivalent to 55-110 dB; typical alarm setting 10% UGLD signal above background			
Display	Back-lit graphic LCD display; 3 status LEDs (green/yellow/red)			
Sensor Type	PVCC coated piezoelectric microphone with built-in automatic self-test sound generator			
Sensor Performance	Response Time	< 3 sec.		
	Minimum Pressure	> 2 bar (29 psi) Methane		
	Coverage Radius	6.5ft -65 ft depending on gas type, leak rate and background noise		
	Frequency Range	18 kHz - 80 kHz		
Electrical data	Analogue signal output	Normal operation	4 to 20 mA	
		Maintenance	Constant 3.4 mA or 4 mA ±1 mA 1 Hz modulation; (adjustable)	
			Fault	< 1,2 mA
	Digital signal output	HART®		
	Power supply	10 to 30 V DC, 3-wire		
	Power consumption	w/ relay, remote	100 mA at 24 V	
Relay specification	Two alarm relays and one error relay, SPDT 5 A @ 230 VAC, 5 A @ 30 VDC			
Environmental conditions (See sensor data sheet)	Temperature	-40 to +70°C (-40 to 158°F) with relays		
	Pressure	700 to 1,300 mbar		
	Humidity	0 to 100 % relative humidity		
Housing	Transmitter housing	Stainless steel SS316L		
	Sensor housing	Polyamide 6		
	Housing protection type	NEMA 4X & 7, IP65/66/67		
	Cable entry	Three ¾" NPT thread openings or M20 cable gland		
	Dimensions (H × W × D),	280 x 150 x 130 mm		
	Weight, approx.	5,0 kg		
Approvals	UL	Class I, Div 1, Groups A, B, C, D; Class I, Zone 1, Group IIC; T-Code T4		
		CSA*	Class I, Div 1, Groups A, B, C, D; Class I, Zone 1, Group IIC; T-Code T4	
			IECEX	Ex db [ia] IIC T4 Gb, -40 ≤ Ta ≤ +70 °C Ex db eb [ia] IIC T4 Gb, -40 ≤ Ta ≤ +70°C; "e" version;
	ATEX	II 2G Ex db [ia] IIC T4 Gb, -40 ≤ Ta ≤ +70 °C II 2G Ex db eb [ia] IIC T4 Gb, -40 ≤ Ta ≤ +70°C; "e" version		
		CE Markings	ATEX (Directive 2014/34/EU) Electromagnetic compatibility (Directive 2014/30/EU) Low voltage (Directive 2014/35/EU)	
	Marine approval*		DNV-GL	

Technical Data

SIL 2

Certificate TÜV Süd

* Pending

Ordering Information

Dräger Polytron® 8900 UGLD	Approval Code	Bestellnummer
Dräger Polytron® 8900 UGLD d S 4-20/HART® Relais Stainless Steel Ex d housing with 4-20 mA HART® output and 3 Relays	ETR 0521	83 28 030
Dräger Polytron® 8900 UGLD e S 4-20/HART® Relay Stainless Steel Ex e housing with 4-20 mA HART® output and 3 Relays, incl. Docking station	ETR 052J	83 29 171
Accessories		
Magnetic Wand		45 44 101
Remote Sensing Head with wall mount kit		83 28 021
Connecting cable with plug for the Remote Sensing Head	5 m	83 23 305
	15 m	83 23 315
	30 m	83 23 330
UGLD Calibration and Bump Test Kit w/o Air Cylinder		83 28 042
Zero Air Gas Cylinder 112L for Calibration and Bump Test Kit		68 13 239
Pole Mount Kit		45 44 198
PolySoft Basic (one year license)		83 28 600
PolySoft Basic (Subscription – yearly fee)		83 28 601
IR Connection Kit (requires PolySoft)		45 44 197

HART® is a registered trademark of the HART Communication Foundation.

Windows® is a registered trademark of Microsoft Corporation.

Notes

Not all products, features, or services are for sale in all countries.
Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

CORPORATE HEADQUARTERS
Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
www.draeger.com

REGION DACH
Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION EUROPE
Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION MIDDLE EAST, AFRICA
Dräger Safety AG & Co. KGaA
Branch Office
P.O. Box 505108
Dubai, United Arab Emirates
Tel +971 4 4294 600
Fax +971 4 4294 699
contactuae@draeger.com

REGION ASIA PACIFIC
Dräger Singapore Pte. Ltd.
61 Science Park Road
The Galen #04-01
Singapore 117525
Tel: +65 6872 9288
Fax: +65 6259 0398
asia.pacific@draeger.com

**REGION CENTRAL
AND SOUTH AMERICA**
Dräger Panamá Comercial
S. de R.L.
59 East Street, Nuevo Paitilla,
House 31, San Francisco Town
Panama City, Panama
Tel +507 377-9100 / Fax -9130
servicioalcliente@draeger.com

Locate your Regional Sales
Representative at:
www.draeger.com/contact

